

LM...LGA 锌合金保持架


该类型尺寸是公制的，广泛应用于亚洲和其它国家。
所有型号均可根据客户要求做镀镍处理，有防锈作用。

LM...LGA (Zinc alloy retainer)

This type is a metric dimension series widely used in Asia and other countries.
All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LM...LGA

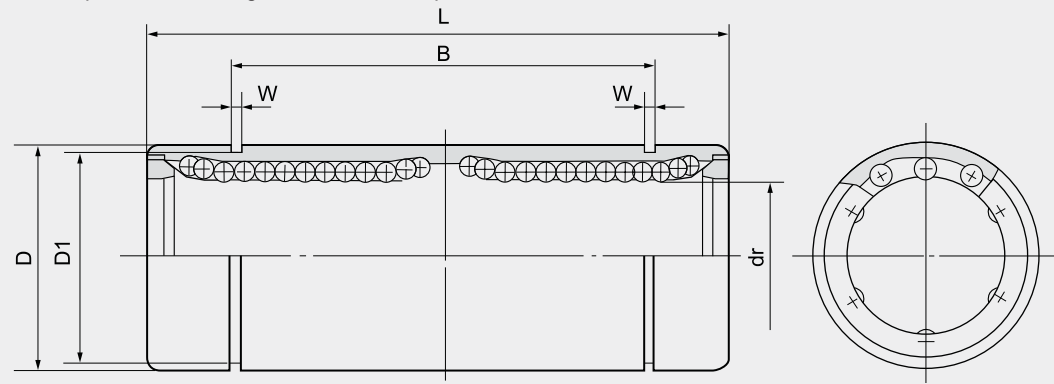

LME...LGA 锌合金保持架


该类型尺寸是公制的，广泛应用于欧洲。
所有型号均可根据客户要求做镀镍处理，有防锈作用。

LME...LGA (Zinc alloy retainer)

This type is a metric dimension series generally used in Europe.
All models can be done with nickle plated according to customers' requirements, with function of rust-proof.



LME...LGA

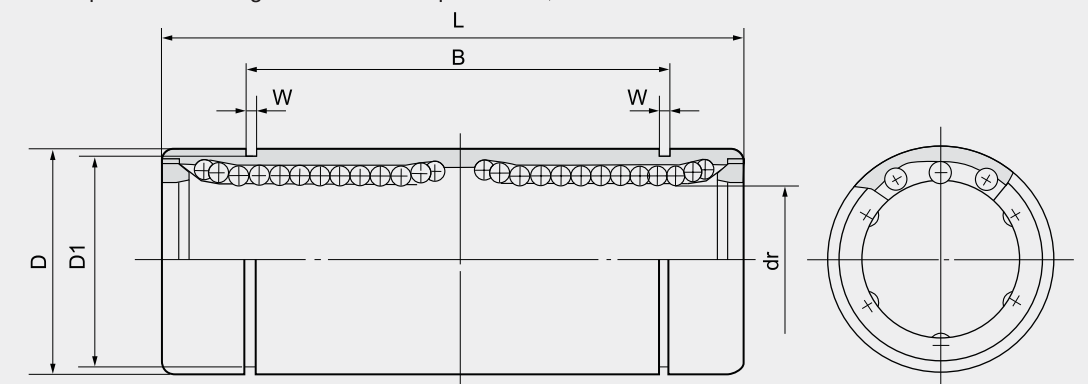

| 公称轴径 Nominal shaft diameter mm | 标准型 LM...LGA | 钢球 列数 Ball circuit | 主要尺寸和公差 Major dimensions and tolerance | | | | | | | | | 偏心 Eccentricity μm | 额定负荷 Basic load rating | | 重量 Weight (g) | |
|--------------------------------------|-----------------|--------------------------|--|-----------------------|----|-----------------------|-----|-----------------------|-----|------|----------------|--------------------------|---------------------------|-----------------------|---------------------|-------|
| | | | dr | | D | | L | | B | W | D ₁ | | 动负荷 Dynamic C N | 静负荷 Static Co N | | |
| | | | mm | 公差 Tolerance μm | mm | 公差 Tolerance μm | mm | 公差 Tolerance μm | | | | | | | | mm |
| 6 | LM6LGA | 4 | 6 | | 12 | 0 | 35 | | 27 | | 1.1 | 11.5 | 15 | 323 | 530 | 18.6 |
| 8 | LM8LGA | 4 | 8 | | 15 | -13 | 45 | | 35 | | 1.1 | 14.3 | 15 | 431 | 784 | 35.6 |
| 10 | LM10LGA | 4 | 10 | 0 | 19 | | 55 | | 44 | | 1.3 | 18 | 15 | 588 | 1,100 | 67 |
| 12 | LM12LGA | 4 | 12 | -10 | 21 | 0 | 57 | 0 | 46 | 0 | 1.3 | 20 | 15 | 813 | 1,570 | 90.4 |
| 13 | LM12LGA | 4 | 13 | | 23 | -16 | 61 | | 46 | | 1.3 | 22 | 15 | 813 | 1,570 | 104 |
| 16 | LM16LGA | 5 | 16 | | 28 | | 70 | | 53 | | 1.6 | 27 | 15 | 1,230 | 2,350 | 179 |
| 20 | LM20LGA | 5 | 20 | | 32 | | 80 | | 61 | | 1.6 | 30.5 | 20 | 1,400 | 2,740 | 230 |
| 25 | LM25LGA | 6 | 25 | 0 | 40 | 0 | 112 | | 82 | | 1.85 | 38 | 20 | 1,560 | 3,140 | 564 |
| 30 | LM30LGA | 6 | 30 | -12 | 45 | -19 | 123 | 0 | 89 | 0 | 1.85 | 43 | 20 | 2,490 | 5,490 | 632 |
| 35 | LM35LGA | 6 | 35 | 0 | 52 | 0 | 135 | -400 | 99 | -400 | 2.1 | 49 | 25 | 2,650 | 6,270 | 993 |
| 40 | LM40LGA | 6 | 40 | -15 | 60 | -22 | 151 | | 121 | | 2.1 | 57 | 25 | 3,430 | 8,040 | 1,460 |

LM20 L M GA M 镀镍 M Nickle plated

国际单位: 1N≈0.102kgf
SIUNIT: 1N≈0.102kgf

| 公称轴径 Nominal shaft diameter mm | 标准型 LME...LGA | 钢球 列数 Ball circuit | 主要尺寸和公差 Major dimensions and tolerance | | | | | | | | | 偏心 Eccentricity μm | 额定负荷 Basic load rating | | 重量 Weight (g) | |
|--------------------------------------|------------------|--------------------------|--|-----------------------|----|-----------------------|-----|-----------------------|-------|------|----------------|--------------------------|---------------------------|-----------------------|---------------------|-------|
| | | | dr | | D | | L | | B | W | D ₁ | | 动负荷 Dynamic C N | 静负荷 Static Co N | | |
| | | | mm | 公差 Tolerance μm | mm | 公差 Tolerance μm | mm | 公差 Tolerance μm | | | | | | | | mm |
| 8 | LME8LGA | 4 | 8 | +9 | 16 | 0 | 46 | | 33 | | 1.1 | 15.2 | 15 | 421 | 804 | 50.4 |
| 12 | LME12LGA | 4 | 12 | -1 | 22 | 0 | 61 | 0 | 45.8 | 0 | 1.3 | 21 | 15 | 813 | 1,570 | 103.8 |
| 16 | LME16LGA | 5 | 16 | +11 | 26 | -11 | 68 | -300 | 49.8 | -300 | 1.3 | 24.9 | 15 | 921 | 1,780 | 148 |
| 20 | LME20LGA | 5 | 20 | -1 | 32 | | 80 | | 61 | | 1.6 | 30.5 | 15 | 1,370 | 2,740 | 238.6 |
| 25 | LME25LGA | 6 | 25 | +13 | 40 | 0 | 112 | | 82 | | 1.85 | 38 | 17 | 1,570 | 3,140 | 543.8 |
| 30 | LME30LGA | 6 | 30 | -2 | 47 | -13 | 123 | 0 | 104.2 | 0 | 1.85 | 44.5 | 17 | 2,500 | 5,490 | 799.6 |
| 40 | LME40LGA | 6 | 40 | +16 | 62 | 0 | 151 | -400 | 121.2 | -400 | 2.15 | 59 | 20 | 3,430 | 8,040 | 1,778 |

LM20 L M GA M 镀镍 M Nickle plated

国际单位: 1N≈0.102kgf
SIUNIT: 1N≈0.102kgf