


圆螺母: TMF-OH
材质: 青铜或黄铜
Round Nut (Oil Port Installed) : TMF-OH
All models are made of Bronze, Brass
or according to customer's requirement.



TMF-OH


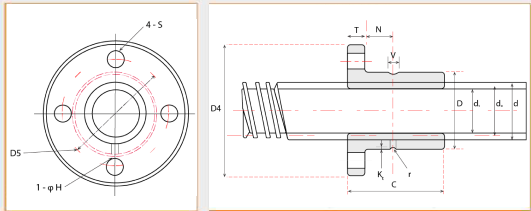


规格 TMF-OH	重量 Weight (g)	D4	Pitch	D	Dh8	D5	C	T	N	S	H	V	r	Kt	FA(kN)	d0	d1	a
TMF10-OH	0.04	36	2	10	20	26	24	5	6	4.3	1.5	2.5	1.8	0.5	1.2	9	7.5	0.6
TMF10L-OH	0.04	36	2	10	20	26	24	5	6	4.3	1.5	2.5	1.8	0.5	1.2	9	7.5	0.6
TMF12-OH	0.05	44	2	12	22	31	30	5	7	5.4	1.5	2.5	1.8	0.5	1.9	11	9.5	0.8
TMF12L-OH	0.05	44	2	12	22	31	30	5	7	5.4	1.5	2.5	1.8	0.5	1.9	11	9.5	0.8
TMF14-OH	0.05	44	3	14	22	31	30	5	7	5.4	1.5	2.5	1.8	0.5	2.3	12.5	10.5	1
TMF14L-OH	0.05	44	3	14	22	31	30	5	7	5.4	1.5	2.5	1.8	0.5	2.3	12.5	10.5	1
TMF16-OH	0.1	51	3	16	28	38	35	6	8	6.6	1.5	2.5	1.8	0.5	3.1	14.5	12.5	1.3
TMF16L-OH	0.1	51	3	16	28	38	35	6	8	6.6	1.5	2.5	1.8	0.5	3.1	14.5	12.5	1.3
TMF18-OH	0.16	56	4	18	32	42	40	6	10.5	6.6	2	3	2.5	0.5	4.1	16	13.5	1.6
TMF18L-OH	0.16	56	4	18	32	42	40	6	10.5	6.6	2	3	2.5	0.5	4.1	16	13.5	1.6
TMF20-OH	0.15	56	4	20	32	42	40	6	10.5	6.6	2	3	2.5	0.5	4.6	18	15.5	2
TMF20L-OH	0.15	56	4	20	32	42	40	6	10.5	6.6	2	3	2.5	0.5	4.6	18	15.5	2
TMF22-OH	0.24	61	5	22	36	47	50	7	14	6.6	2.5	3.5	2.5	0.7	5.8	19.5	16.5	2.3
TMF22L-OH	0.24	61	5	22	36	47	50	7	14	6.6	2.5	3.5	2.5	0.7	5.8	19.5	16.5	2.3
TMF25-OH	0.21	61	5	25	36	47	50	7	14	6.6	2.5	3.5	2.5	0.7	6.6	22.5	19.5	3.1
TMF25L-OH	0.21	61	5	25	36	47	50	7	14	6.6	2.5	3.5	2.5	0.7	6.6	22.5	19.5	3.1
TMF28-OH	0.39	76	5	28	44	58	56	8	15	9	2.5	3.5	2.5	0.7	8.5	22.5	22.5	4
TMF28L-OH	0.39	76	5	28	44	58	56	8	15	9	2.5	3.5	2.5	0.7	8.5	22.5	22.5	4
TMF32-OH	0.32	76	6	32	44	58	56	8	15	9	2.5	3.5	2.5	0.7	9.8	29	25.5	5.2
TMF32L-OH	0.32	76	6	32	44	58	56	8	15	9	2.5	3.5	2.5	0.7	9.8	29	25.5	5.2
TMF36-OH	0.53	84	6	36	52	66	60	8	17	9	3	4	3.2	0.7	12	33	29.5	6.7
TMF36L-OH	0.53	84	6	36	52	66	60	8	17	9	3	4	3.2	0.7	12	33	29.5	6.7
TMF40-OH	0.72	98	6	40	58	76	70	10	19	11	3	4	3.2	0.7	16	37	33.5	8.4
TMF40L-OH	0.72	98	6	40	58	76	70	10	19	11	3	4	3.2	0.7	16	37	33.5	8.4

圆螺母: TMK
材质: 青铜或黄铜
Round Nuts - TMK
All models are made of Bronze, Brass
or according to customer's requirement.



TMK



规格 TMK	重量 Weight (g)	D4	Pitch	D	Dh8	D5	C	W	T	N	S	H	V	r	Kt	FA(kN)	d0	d1	a
TMK10	0.06	36	2	10	20	26	24	22	5	6	4.3	1.5	2.5	1.8	0.5	1.2	9	7.5	4
TMK10L	0.06	36	2	10	20	26	24	22	5	6	4.3	1.5	2.5	1.8	0.5	1.2	9	7.5	4
TMK12	0.08	44	2	12	22	31	30	24	5	7	5.4	1.5	2.5	1.8	0.5	1.9	11	9.5	3
TMK12L	0.08	44	2	12	22	31	30	24	5	7	5.4	1.5	2.5	1.8	0.5	1.9	11	9.5	3
TMK14	1	44	3	14	22	31	30	24	5	7	5.4	1.5	2.5	1.8	0.5	2.3	12.5	10.5	4
TMK14L	1	44	3	14	22	31	30	24	5	7	5.4	1.5	2.5	1.8	0.5	2.3	12.5	10.5	4
TMK16	1.3	51	3	16	28	38	35	30	6	8	6.6	1.5	2.5	1.8	0.5	3.1	14.5	12.5	3
TMK16L	1.3	51	3	16	28	38	35	30	6	8	6.6	1.5	2.5	1.8	0.5	3.1	14.5	12.5	3
TMK18	1.6	56	4	18	32	42	40	34	6	10.5	6.6	2	3	2.5	0.5	4.1	16	13.5	4
TMK18L	1.6	56	4	18	32	42	40	34	6	10.5	6.6	2	3	2.5	0.5	4.1	16	13.5	4
TMK20	2	56	4	20	32	42	40	34	6	10.5	6.6	2	3	2.5	0.5	4.6	18	15.5	4
TMK20L	2	56	4	20	32	42	40	34	6	10.5	6.6	2	3	2.5	0.5	4.6	18	15.5	4
TMK22	2.3	61	5	22	36	47	50	40	7	14	6.6	2.5	3.5	2.5	0.7	5.8	19.5	16.5	4
TMK22L	2.3	61	5	22	36	47	50	40	7	14	6.6	2.5	3.5	2.5	0.7	5.8	19.5	16.5	4
TMK25	3.1	61	5	25	36	47	50	40	7	14	6.6	2.5	3.5	2.5	0.7	6.6	22.5	19.5	4
TMK25L	3.1	61	5	25	36	47	50	40	7	14	6.6	2.5	3.5	2.5	0.7	6.6	22.5	19.5	4
TMK28	4	76	5	28	44	58	56	48	8	15	9	2.5	3.5	2.5	0.7	8.5	22.5	22.5	3
TMK28L	4	76	5	28	44	58	56	48	8	15	9	2.5	3.5	2.5	0.7	8.5	22.5	22.5	3
TMK32	5.2	76	6	32	44	58	56	48	8	15	9	2.5	3.5	2.5	0.7	9.8	29	25.5	3
TMK32L	5.2	76	6	32	44	58	56	48	8	15	9	2.5	3.5	2.5	0.7	9.8	29	25.5	3
TMK36	6.7	84	6	36	52	66	60	56	8	17	9	3	4	3.2	0.7	12	33	29.5	3
TMK36L	6.7	84	6	36	52	66	60	56	8	17	9	3	4	3.2	0.7	12	33	29.5	3
TMK40	8.4	98	6	40	58	76	70	62	10	19	11	3	4	3.2	0.7	16	37	33.5	2
TMK40L	8.4	98	6	40	58	76	70	62	10	19	11	3	4	3.2	0.7	16	37	33.5	2